

1

CAMARA TERMOGRAFICA DE BOLSILLO GHIK-POCKET2 ,Wifi, ALARMA

CAMARA TERMOGRAFICA DE BOLSILLO POCKET2


GIMATEC



TFT tactil ,WIFI, FLASH,

2

Sensor 256x192

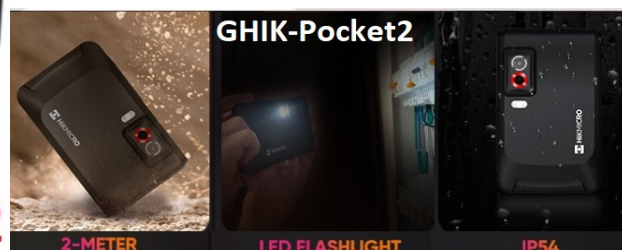


CONEXIÓN WIFI y VISION FOTO+VIDEO MP4 TERMOGRAFICA DE BOLSILLO GHIK POCKET2

3

APP WIFI= KIKMICRO Viewer

ALARMAS EN MAS O EN MENOS en MAX o MIN

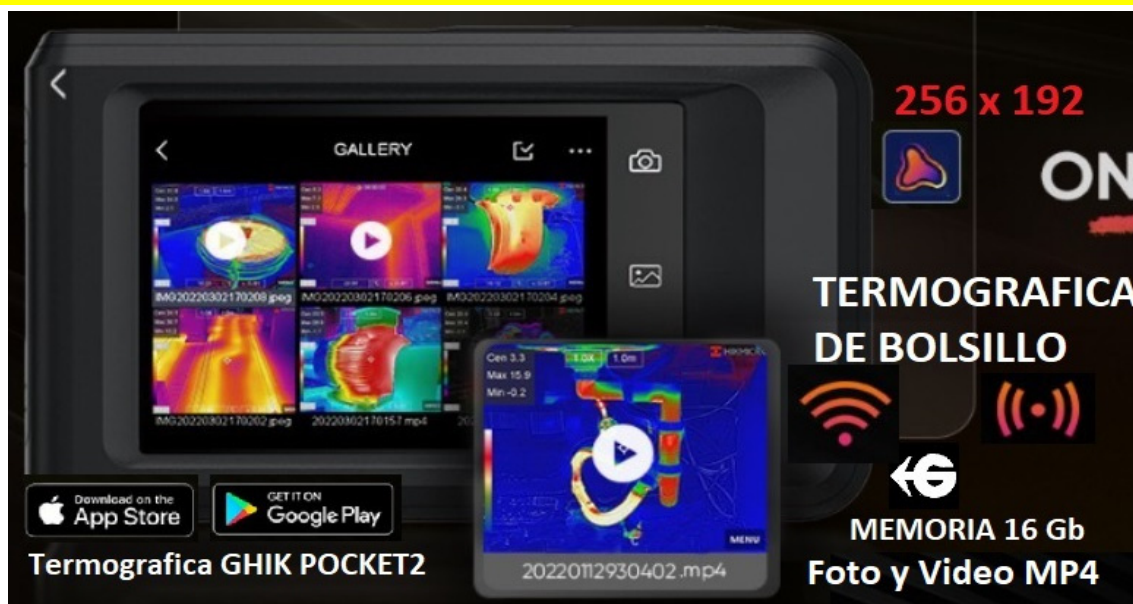

MODOS DE VISION CAMARA TERMOGRAFICA DE BOLSILLO GHIK POCKET2

4



CARACTERISTICAS Camara Termografica de BOLSILLO GHIK POCKET2 DE USO GENERAL

		Pocket2	5
Thermal Module	Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays	
	IR Resolution	256 x 192 (49,152 pixels)	
	NETD	< 0.04°C (40 mK) at 25°C (77°F) Ambient Temperature, F# = 1.0	
	Focal Length	3.5 mm	
	FOV (Field of View)	50.0 °H × 37.2 °V	
	Image Frequency	25 Hz	
	Focus	Fixed	
	IFOV (Spatial Resolution)	3.43 mrad	
Optical Module	Picture Resolution	Configurable: 2 MP, 5 MP, 8 MP	
Image Display	Display	640 × 480 Resolution, 3.5" LCD Touch Screen	
	Color Palettes	7: White Hot, Black Hot, Rainbow, Ironbow, Red Hot, Fusion, Rain	
	Image Modes	Thermal/Optical/Fusion/PIP	
Measurement and Analysis	Object Temperature Range	-20 °C to 400 °C (-4 °F to 752 °F)	6
	Accuracy	Max (±2°C/3.6°F, ±2%), for ambient temperature 15°C to 35°C (59°F to 95°F) and object temperature above 0°C (32°F)	
	Measurement Presets	Center Spot, Hot Spot, Cold Spot, Off	
	High Temperature Alarm	Audible/visual alarm of above temperature threshold, User-defined temperature threshold	
Storage	Storage Media	EMMC (16 GB)	
	Image Storage Capacity	Approx. 60,000 Images	
	Image File Format	Radiometric.JPEG with Measurement Data Included	
	Text Note	Max. 200 Characters	7
	Video Storage Capacity	Approx. 10 h	
	Video File Format	Standard MP4 Non-radiometric video	
Functions	LED Light	Yes	
	Microphone	Yes	
	Buzzer	Yes	8
	Wi-Fi	802.11 b/g/n (2.4 GHz, 5 GHz)	
	Bluetooth	Bluetooth 4.2	
	Connect with APP	Yes, HIKMICRO Viewer	
	Level/Span	Auto/Manual/1-Tap Touch Screen	9
Power System	Battery Operating Time	4 Hours Continuous Running	
General	Menu Language	21 Languages	
	Protection Level	IP54	
	Drop Test Height	2 m (6.56 ft)	
	Weight	Approx. 218 g (0.48 lb)	
	Packing List	Thermal Imager x 1, Pouch x 1, Wrist Strap x 1, USB Cable x 1, Power Supply x 1, Quick Start Guide x 1, Calibration Certificate x 1	

OTROS INSTRUMENTOS y EQUIPOS en VENTA-ALQUILER Opcion COMPRA.-

Grabe codigo QR en su movil=

 - **CAMARAS TERMOGRAFICAS**.- varios modelos y marcas ,Hasta 1280x960, 1500°C , VideoRadiometric ,Humedad, etc.

 - **VIDEOSCOPIOS desde 1,9mm - articulados ,etc. y CAMARAS INSPECCION** TUBO empuje desde 13mm a ROBOT

 - **AGUA**.- CONTROL CONSUMO , GEOFONO , LOCALIZADORES ,ANTI-FUGAS y ESTERILIZADORES Ultravioleta UV-C

 - **LOCALIZADORES FUGAS**: Valvulas ANTI-FUGA ,GEOFONOS y GASTRAZA H2 , ULTRASONIDOS , etc.

 - **INTRUM. MEDIDA** .- Analizador COMBUSTION ,°C, %H,CO,CO2 ,DataLogger, Distancia ,Velocidad ,MICROSCOPIOS, etc.

www.gimateg.com
TERMOGRAFICA DE BOLSILLO GHIK POCKET2
info@gimatec.es

<https://www.gimateg.com/>

Calle Antonio Cusido 136 bajos 08208 SABADELL (Barcelona)

Tel.- 937071855 627152432 - 607244335 Fax.-937247140