

"GimateG Distribuidor Oficial de Equipos para : LOCALIZACION FUGAS ,TERMOGRAFIA ,INSPECCION ,INSTRUM. MEDIDA y PRL "

LOCALIZADOR SR24 para SONDAS EMISORAS -CAMARAS -CABLE ELECTRICO y TUBO METAL

LOCALIZADOR CABLE TUBO SONDAS




GIMATEG
USB - Tarjeta SD
Bluetooth GPS

* 30 user definable frequencies can be set from 10 Hz to 35,000 Hz

Active Line Trace Frequencies*	120 Hz, 1 kHz, 8 kHz and 33 kHz
Passive Power Trace	50 Hz, 60 Hz, <4 kHz Broadband
Passive Radio Trace	4 kHz-15 kHz, 15 kHz-36 kHz
Sonde Frequencies *	16 Hz, 512 Hz, 640 Hz, 850 Hz, 8 kHz, 16 kHz, 33 kHz
Power Source	4 C-Cell Batteries
Battery Life	Approximately 16 Hours
Weight	3.5 lbs. (1.6 kg)
Wireless Technology	Bluetooth® Class 1
Wireless Range	1093 yards (1000 meters)
GPS Average Accuracy	Less than 2.5 m (8.2 ft)

RIDGIDtrax
Available on the Google play
Available on the App Store
APLICACION GRATUITA

GimateG Distribuidor Oficial RIDGID

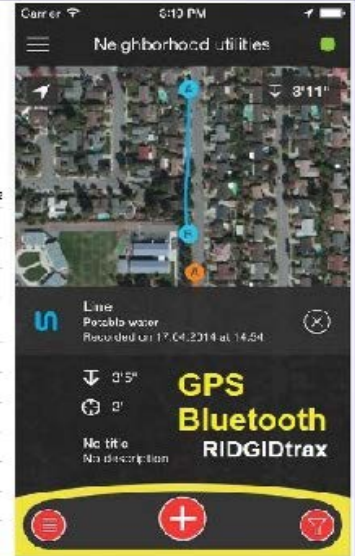


5

LOCALIZADOR CABLE SONDAS Y TUBO METALICO

LOCALIZADOR MRT700 : para SONDAS EMISORAS -CAMARAS -TUBO METAL -CABLE y Punto de FALLA

LOCALIZADOR CABLES SONDAS y FALLAS Esquema de trabajo - Procedimiento de detección falla

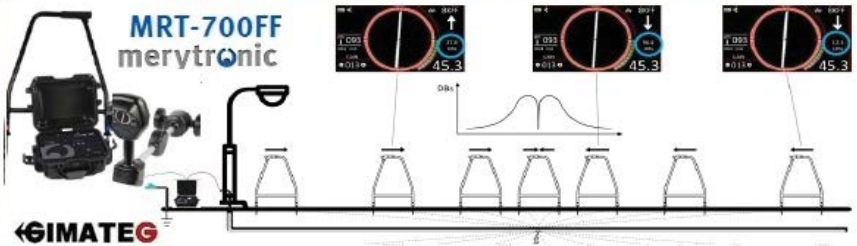

ANTENA GPS <2cm Zeno FLX100



GPS Centimetrico

GEORADAR LEICA
DS2000. 4 RUEDAS.

Sin GPS
Consultar GPS segun precision a escoger

Georadar Leica DS2000-4 wheel system. The 700 MHz for small shallow targets, up to a depth 2-3m. The 250 MHz for bigger targets situated deeper underground up to 4-5m. Battery Kit, Battery Charger, Antenna Cover, LAN Cable, Acquisition Software & Data Storage. User's Manual, Unboxing Video, Producer inspection certificate.



GEORADAR

6

LOCALIZADOR +FALLA CABLE

GEORADAR Y GPS

8

GENERADORES FREQ



EMISOR INDUCCION Y SONDAS



OTROS INSTRUMENTOS y EQUIPOS en VENTA-ALQUILER Opcion COMPRA.-

Grabe codigo QR en su movil-

- CAMARAS TERMOGRAFICAS- varios modelos y marcas ,Hasta 640x480 , 1500°C , VideoRadiometrico ,Humedad, etc.
- VIDEOSCOPIOS desde 1.9mm - articulados ,etc. y CAMARAS INSPECCION TUBO empuje desde 13mm a ROBOT
- AGUA- CONTROL CONSUMO , GEOFONO , LOCALIZADORES ,ANTI-FUGAS y ESTERILIZADORES Ultravioleta UV-C
- LOCALIZADORES FUGAS: Valvulas ANTI-FUGA ,GEOFONOS y GASTRAZA H2 , ULTRASONIDOS , etc.
- INTRUM. MEDIDA - Analizador COMBUSTION ,°C,%H,CO,CO2 ,DataLoger, Distancia ,Velocidad ,MICROSCOPIOS, etc.



www.gimateg.com

LOCALIZACION INSTALACIONES ENTERRADAS

info@gimatec.es
www.gimatec.es



Calle Antonio Cusido 136 bajos 08208 SABADELL (Barcelona)

Tel.- 937071855

627152432 - 607244335 -680172572

TUBOS NO METALICOS

CABLES

LOCALIZADOR TUBOS PVC HORMIGON PLASTICO

TUBOS METALICOS

BUSCADOR A DISTINTAS PROFUNDIDADES

1 VENTA ALQUILER GEORADAR GPR LOCALIZADOR SERVICIOS SOTERRADOS METAL O NO METAL



Evite Roturas Servicios Enterrados



DETECTOR LOCALIZADOR INSTALACIONES
Incluye la Detección Fibra optica ,PVC ,PE ,Plomo ,Ladrillos ,Metales ,Cable .etc.




2

USO INTUITIVO

CARACTERISTICAS GPR eSafe y EJEMPLOS POSICION SEGÚN PROFUNDIDAD

ESQUEMA Esafe

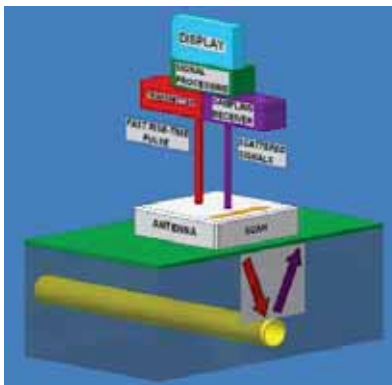

CARACTERISTICAS eSafe	Main Features	consulte: info@gimatec.com
Antenna Type & Frequency Range	Ground contact X-Polar	135MHz - 835MHz
Sensitivity (threshold) adjustment	16 operator adjustable increments (default 8)	
Chronos Masking - 4 Levels + All (% attained depth)	Shallowest 16%; 32%, Deepest 68%; 84%	
Detection Range (Average conditions)	50mm - 1500mm subject to soil/environmental change	
Depth Estimation (with Safety Protocol)	Nearest 0.1 metres +/- 0.1 metres	
Depth Estimation (with Safety Protocol overridden)	Nearest 0.1 metres +/- 0.3 - 0.5 metres	
Display Screen	High Contrast 177mm Portrait Sunlight readable LCD	
Display Angle Adjustment	90 Degrees Operator adjustable tilt	
Battery Type	Removable 16.4v Lithium-ion Rechargeable Pod	
Battery Life	3-5 hrs Full charge (temperature dependant)	
Battery Charging	External (110v-220v AC) charger 2-6 hrs	
Ambient Operating Temperature Range	Minus 10 Degrees Celsius to Plus 50 Degrees Celsius	

FACIL USO NO ESPECIALISTA

PANTALLA SEGÚN MODELO



TFT eSafe Plus



TFT eSafe Pro

